

# SLZ 300 E

## Cycle control:

Heidenhain MANUALplus 620 or Siemens 840D SolutionLine with user interface Operate with manual functions

## Specifications and performance

### Specifications

SLZ 300E	Unit	Value
Swing over bed	mm	300
Swing over cross slide	mm	150
Bed width	mm	240
Spindle head in accordance with DIN 55027	size	5
Spindle bore $\varnothing$	mm	40/55 (Option)
Spindle $\varnothing$ in the front bearing	mm	70/90 (Option)
Tailstock quill $\varnothing$	mm	50
Tailstock stroke	mm	125
Tailstock Morse taper	MK	3
Center distance	m	0,75

### Performance

SLZ 300E	Unit	Value
Main drive	KW	11,5
Speed range	1/min	1-4.500

### Dimensions

Length	mm	2.000
Width	mm	2.000
Height	mm	1.850

### Please note:




Good machine access and operation



Direct position measurement on the X-axis



Stainless steel paneling in the permanent cutting zone

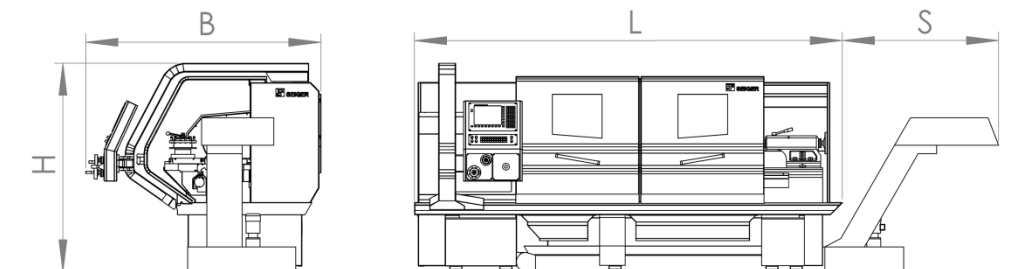

Technical changes and errors excepted