

SLZ 420 E

Cycle control:

Heidenhain MANUALplus 620 or Siemens 840D SolutionLine with user interface Operate with manual functions

Specifications and performance

Specifications

SLZ 420E	Unit	Value
Swing over bed	mm	430
Swing over cross slide	mm	220
Bed width	mm	350
Spindle head in accordance with DIN 55027	size	6
Spindle bore \varnothing	mm	80/93 (Option)
Spindle \varnothing in the front bearing	mm	110/130 (Option)
Tailstock quill \varnothing	mm	70
Tailstock stroke	mm	150
Tailstock Morse taper	MK	5
Center distance	m	1,0/1,5/2,0

Performance

SLZ 420E	Unit	Value
Main drive	KW	11/ 20 (Option)
Speed range	1/min	1-3.600

Dimensions

Length	mm	1.990 +Center distance
Width	mm	2.200
Height	mm	1.970

Please note:




350 mm bed width



Optional with gearbox or 20 kW main drive



Spindle bore 80 mm as standard, 93 mm as an option

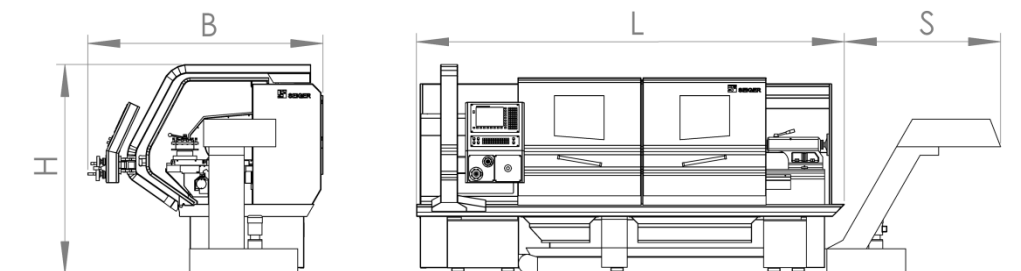

Technical changes and errors excepted