

SLZ 570 E

Cycle control:

Heidenhain MANUALplus 620 or Siemens 840D SolutionLine with user interface Operate with manual functions

Specifications and performance

Specifications

SLZ 570 E	Unit	Value
Swing over bed	mm	570
Swing over cross slide	mm	340
Bed width	mm	350
Spindle head in accordance with DIN 55027	size	8
Spindle bore \varnothing	mm	93-130
Spindle \varnothing in the front bearing	mm	130-170
Tailstock quill \varnothing	mm	90
Tailstock stroke	mm	180
Tailstock Morse taper	MK	5
Center distance	m	1,0/1,5/2,0

Performance

SLZ 570 E	Unit	Value
Main drive	KW	25
Speed range	1/min	1-3.000

Dimensions

Length	mm	1.990 +Center Distance
Width	mm	2.200
Height	mm	1.970


Please note:



Spindle bore 93 mm standard to 130 mm (option)




Non-destructive safety clutch in the X-axis and Z-axis (FS)



Optional extended cross slide with linear guide



Powerful drive 25 kW
Optional: automatic gearbox

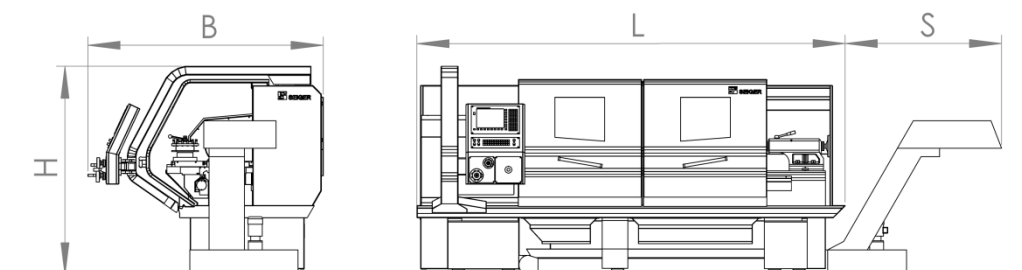

Technical changes and errors excepted