

SLZ 620 E

Cycle control:

Heidenhain MANUALplus 620 or Siemens 840D SolutionLine with user interface Operate with manual functions

Specifications and performance

Specifications

SLZ 620 E	Unit	Value
Swing over bed	mm	660
Swing over cross slide	mm	435
Bed width	mm	400
Spindle head in accordance with DIN 55027	size	8
Spindle bore \varnothing	mm	93-160
Spindle \varnothing in the front bearing	mm	130-200
Tailstock quill \varnothing	mm	90
Tailstock stroke	mm	180
Tailstock Morse taper	MK	5
Center distance	m	1,0/2,0/3,0

Performance

SLZ 620 E	Unit	Value
Main drive	KW	30
Speed range	1/min	1-2.500

Dimensions

Length	mm	2.100 +Center Distance
Width	mm	2.400
Height	mm	1.950

Please note:




Bed width 400 mm
at best
accessibility



30 KW main drive with
automatic gearbox for
efficient machining



Compact design
no external control
cabinet

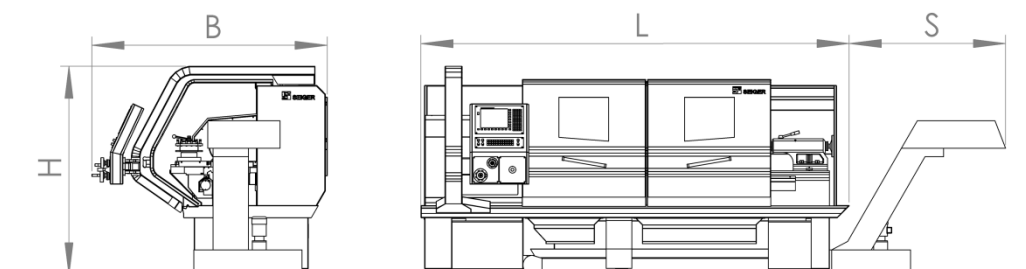

Technical changes and errors excepted