

SPL

1400 CG/1400 LC



Cycle control:

Heidenhain MANUALplus 620 or Siemens one with user interface Operate with manual functions

Specifications and performance

Specifications

	Unit	1400 CG Value	1400 LC Value
Swing in the bridge	mm	1.400-2.300	1.400-2.300
Swing over the lathe cheek guides	mm		1.000-1900
Bridge opening	mm	300-900	300-1.500
Spindle head in accordance with DIN 55027	Gr.	15-28	15-28
Spindle bore Ø	mm	130-530	130-530
Travel path of the positioning support	mm		400-800
Operating travel cross slide	mm	400-1.200	400-1.200
Operating travel saddle	mm	300-800	300-800

Performance

	Unit	1400 CG Value	1400 LC Value
Main drive	KW	30-46	46-70
Speed range	1/min	1-1.200	1-700
Dimensions			
Length	mm	4.050	5.500
Width	mm	3.880	4.050
Height	mm	2.300	2.500

Please note:




Highly modular machine concept adapted to every customer wish



Modular design thanks to intelligent modular systems in the machine bed



Adapted spindle systems and performances for customer applications

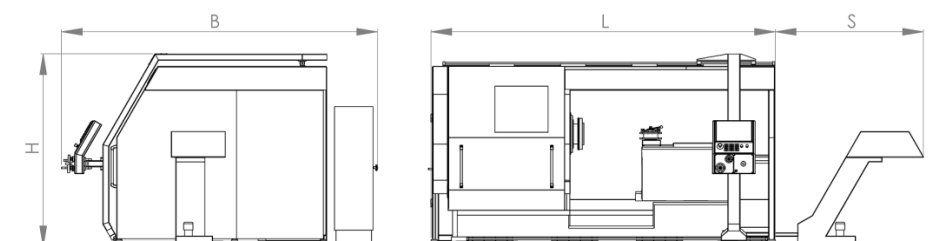

Technical changes and errors excepted